

MADERA™ 16-1/2" HEIGHT with EVERCLEAN®

- Floor mount flushometer valve toilet
 - Vitreous china
 - Low-consumption (6.0 Lpf/1.6 gpf)
 - EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
 - 10" or 12" roughing-in
 - 16-1/2" rim height for accessible application
 - Condensation channel
 - Elongated bowl
 - Powerful direct-fed siphon jet action
 - Fully glazed 2-1/8" trapway
 - 10" x 12" water surface area
 - 1-1/2" inlet spud
 - 2 bolt caps
 - 100% factory flush tested
- 3461.160** Elongated bowl only, top spud
 - 3461.001** Same as above, Universal Bowl
 - 3462.160** Elongated bowl only, top spud with slotted rim for bedpan holding (White only)
 - 3462.001** Same as above, Universal Bowl
 - 3465.160** Elongated bowl only, top spud with 4 bolts
 - 3465.001** Same as above, Universal Bowl
 - 3466.160** Elongated bowl only, top spud with slotted rim for bedpan holding with 4 bolts (white only)
 - 3466.001** Same as above, Universal Bowl
 - 3463.160** Elongated bowl only, back spud
 - 3463.001** Same as above, Universal Bowl
 - 3464.160** Elongated bowl only, back spud with slotted rim for bedpan holding (White only)
 - 3464.001** Same as above, Universal Bowl

Component Parts:

- 047007-0070A** Inlet spud (furnished with bowl)
- 481310-100** Bolt caps with retainers (furnished with bowl)

Nominal Dimensions:

718 x 356 x 419mm (28-1/4" x 14" x 16-1/2")

Recommended working pressure—between 25 psi at valve when flushing and 80 psi static

Fixture only, less seat and flush valve

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous China Fixtures



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:


- Color: White Bone Linen Black
- Seat:
 - American Standard #5901.100 Heavy duty open front less cover
 - American Standard #5905.100 Extra heavy duty open front less cover
- Flushometer Valve:
 - American Standard Selectronic™ #6065.161.002 DC Power (Top Spud)
 - American Standard Selectronic™ #6065.261.007 DC Power (Back Spud)
 - American Standard Selectronic™ #6067.261.007 AC Power (Back Spud)
 - American Standard Selectronic™ #6068.261.007 Multi AC Power (Back Spud)




MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES - CHECK LOCAL CODES.

EVERCLEAN®
Surface

3461.160/3462.160/3465.160/3466.160
3461.001/3462.001/3465.001/3466.001

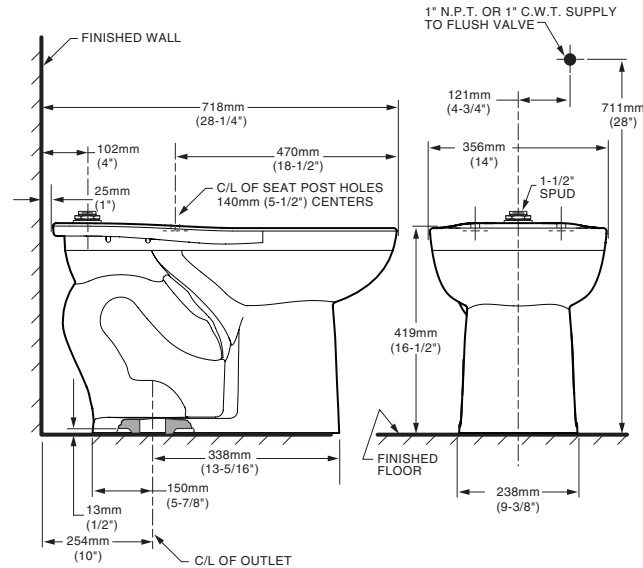

3463.160/3464.160
3463.001/3464.001

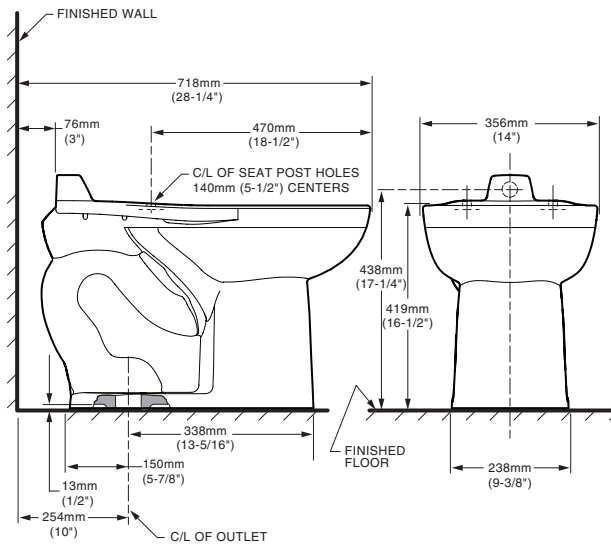

NOTES:

PRODUCT 3461 AND 3463 SHOWN, 3462 AND 3464 SAME AS EXCEPT WITH SLOTTED RIM FOR BED PAN HOLDING.
TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON THE FLUSHOMETER VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGHING.
THIS TOILET DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 254MM (10") AND A MAXIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
FLUSHOMETER VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. FLUSHOMETER VALVE REQUIREMENTS FOR 12" (305MM) ROUGH-IN: SWEAT EXTENSION NIPPLE IS REQUIRED. REFER TO VALVE MANUFACTURER AND LOCAL CODES.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.