American Standard

Style That Works Better

BARRIER FREE

AFWALL™ ELONGATED FLUSH VALVE TOILET

VITREOUS CHINA LESS EVERCLEAN®

AFWALL™ ELONGATED TOILET LESS EVERCLEAN®

- Flush valve toilet
- Vitreous china
- Conventional glaze
- Low-consumption (6.0 Lpf/1.6 gpf)
- Wall-mounted elongated bowl
- Fully glazed trapway
- Direct-fed siphon jet action
- 1-1/2" inlet spud
- Fully-glazed 2-1/8" trapway
- 10" x 12" water surface area
- 100% factory flush tested

❑ **2257.103** Elongated bowl only, top spud
❑ **2257.001** Same as above, Universal bowl
❑ **2633.001** Elongated Universal bowl only, top spud with slotted rim for bedpan holding (White only)
❑ **2634.001** Elongated Universal bowl only, back spud

Component Parts:
❑ **047007-0070A** Inlet Spud (furnished with bowl)

Nominal Dimensions:
For 2257.103:
635 x 375 x 381mm (25" x 14-3/4" x 15")
For Others:
660 x 356 x 381mm (26" x 14" x 15")

Recommended working pressure – between 30 psi at valve when flushing and 80 psi static

Fixture only, less seat, bolt caps, and flush valve

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures

To Be Specified:
❑ Color: ❑ White ❑ Bone
❑ Seat: 5901.100 American Standard Seat
❑ 5901.110 American Standard Seat with EverClean®
❑ Alternate Seat: 5905.100 Heavy Duty American Standard Seat
❑ 5905.110 Heavy Duty American Standard Seat with EverClean
❑ Flush Valve:
  ❑ American Standard Selectronic™ #6065.161.002 DC Power (Top Spud)
  ❑ American Standard Selectronic™ #6065.262.007 DC Power (Concealed Back Spud)
  ❑ American Standard Selectronic™ #6067.262.007 AC Power (Concealed Back Spud)
  ❑ American Standard Selectronic™ #6068.262.007 Multi AC Power (Concealed Back Spud)
❑ Carrier Fitting (by others):

SEE REVERSE FOR ADDITIONAL ROUGHING-IN DIMENSIONS

2257.103

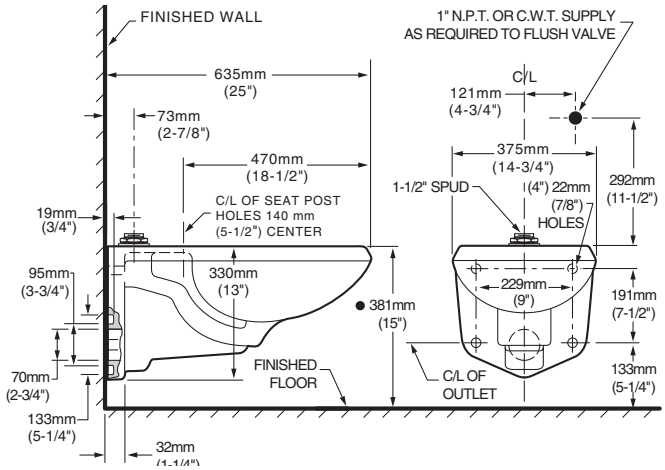

NOTES:
● Toilet designed to meet ADA handicapped standards with seat height set at 432 to 483mm (17" to 19") from finished floor.

WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-FELT (WAX RING NOT RECOMMENDED).
SUGGESTED 2mm (1/16) CLEARANCE BETWEEN FACE OF WALL AND BACK OF BOWL.
TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON THE FLUSH VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGHING.
FLUSH VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
CARRIER FITTING AS REQUIRED TO BE FURNISHED BY OTHERS.
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORT.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES - CHECK LOCAL CODES.
● When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor.

© 2010 AS America Inc.

AFWALL™ ELONGATED FLUSH VALVE TOILET

VITREOUS CHINA LESS EVERCLEAN®

2257.001/2633.001

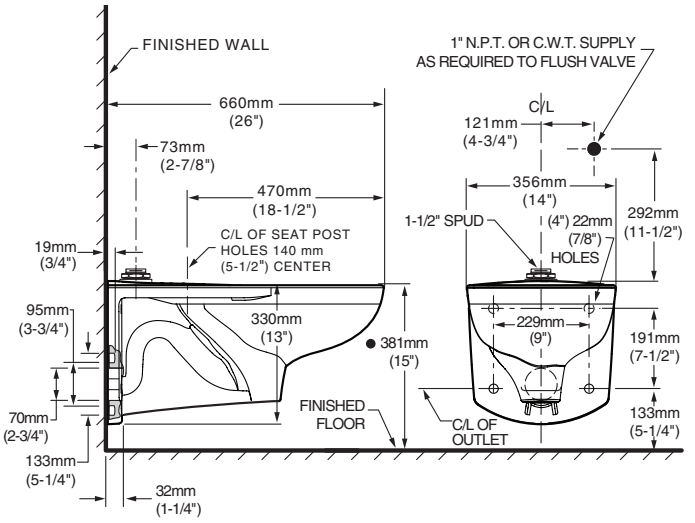

2634.001

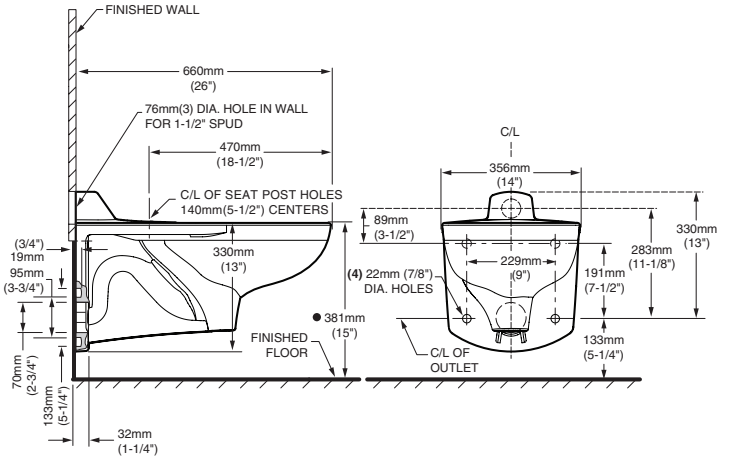

NOTES:
● Toilet designed to meet ADA accessibility standards when top of seat height set at 432 to 483mm (17" to 19") from finished floor.

PRODUCT 2257.001 SHOWN, 2633.001 SAME AS EXCEPT WITH SLOTTED RIM FOR BED PAN HOLDING.

WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-FELT (WAX RING NOT RECOMMENDED).
SUGGESTED 2mm (1/16) CLEARANCE BETWEEN FACE OF WALL AND BACK OF BOWL.
TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON THE FLUSHOMETER VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGHING.
FLUSHOMETER VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
CARRIER FITTING AS REQUIRED TO BE FURNISHED BY OTHERS.
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORT.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages

© 2010 AS America Inc.