

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:

Requirements:

By:

Date:

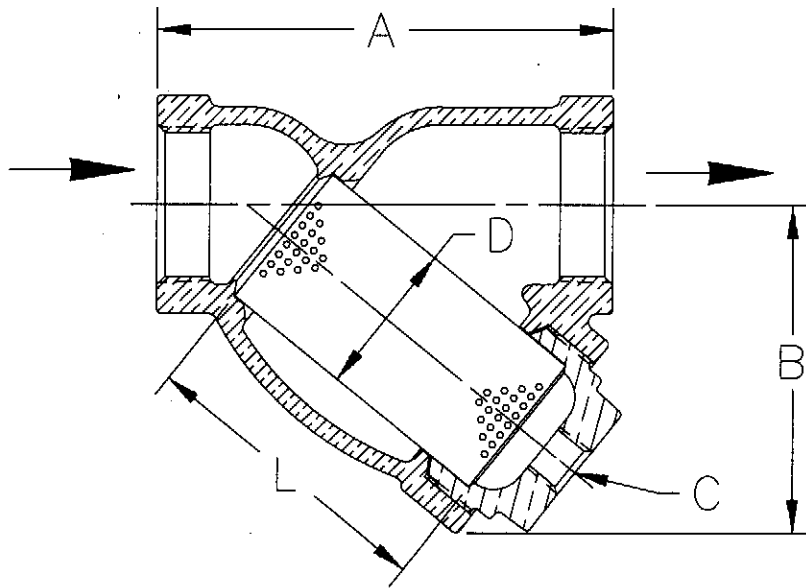


2" Strainer shown above

Dimensions A & B $\pm 1/8"$ [3mm]

DESCRIPTION	DIMENSIONS					
	1/2" [DN15]	3/4" [DN20]	1" [DN25]	1-1/4" [DN32]	1-1/2" [DN40]	2" [DN50]
CONNECTION (NPT)	1/2" [DN15]	3/4" [DN20]	1" [DN25]	1-1/4" [DN32]	1-1/2" [DN40]	2" [DN50]
A (FACE TO FACE)	3-1/2" [89mm]	4" [102mm]	4-3/4" [121mm]	5-1/4" [133mm]	6" [152mm]	7" [178mm]
B (BOTTOM TO ϕ INLET)	3-1/8" [79mm]	3-9/16" [90mm]	4-3/16" [106mm]	4-7/8" [124mm]	5-9/16" [141mm]	6-11/16" [170mm]
C (BLOW DOWN THREAD)	3/8" NPT [DN10]	1/2" NPT [DN15]				
D (DIA. OF SCREEN)	13/16" [21mm]	31/32" [25mm]	1-3/16" [30mm]	1-1/2" [38mm]	1-63/64" [50mm]	2-3/8" [60mm]
L (LENGTH OF SCREEN)	2-1/16" [52mm]	2-3/8" [60mm]	2-15/16" [75mm]	3-3/8" [86mm]	3-3/4" [95mm]	4-5/8" [117mm]
WEIGHT	1-1/2 lb [.7 kgs]	2 lb [.9 kgs]	3-1/2 lb [1.6 kgs]	5 lb [2.3 kgs]	7-1/2 lb [3.4 kgs]	12 lb [5.5 kgs]
MAXIMUM ALLOWABLE PRESSURE (VESSEL DESIGN)	300 psig at 422°F [20.7 bar at 217°C] 500 psig at 150°F [34.5 bar at 65.6°C]					

LIST OF MATERIALS

NAME OF PART	MATERIAL
BODY	ASTM B62
SCREEN	BRASS .045" PERF.
GASKET	COPPER
RETAINER	ASTM B16

 Armstrong International, Inc. Three Rivers Division Three Rivers, MI 49093 (616) 273-1415 Fax (616) 278-6555		
Product	CD No.	Date
F4SC STRAINER 1/2" - 2" CAST BRONZE B62	1064	12/5/96
		Rev. A