


Pipe Hangers

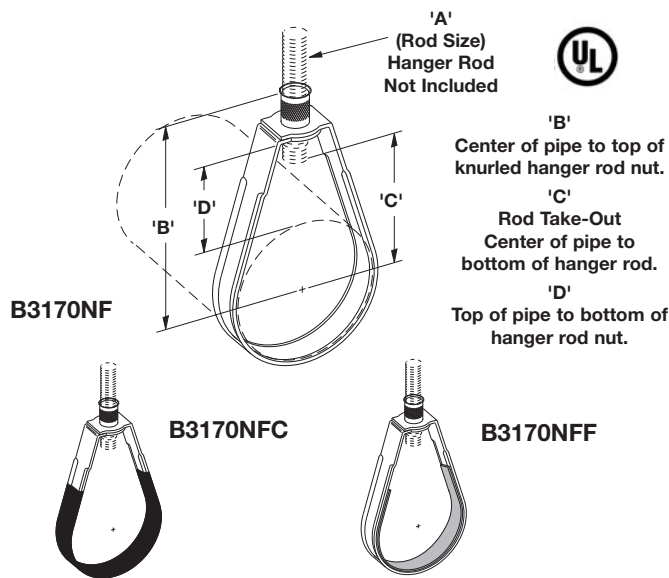

Material: Steel

Standard Finish: Pre-Galvanized

Service: Designed for suspending insulated pipe (with shield) or non-insulated pipe allowing for vertical adjustment.

Ordering: Specify part number and finish.

Approvals: Underwriters' Laboratories Listed for 1/2" (15) thru 4" (100). Complies with Federal Specification WW-H-171E & A-A-1192A Type 10 and Manufacturers Standardization Society MSS SP-69 & SP-58 Type 10, and the National Fire Protection Association Code (NFPA).

Note: Knurled nut available as B3170KN-(rod size) Specify the B3170NF part number it will be used in when ordering.

Figure B3170NF Adjustable Swivel Ring

(Available with plastic coating as B3170NFC-size or felt lined as B3170NFF-size)

Part No.	Nominal Pipe Size		Rod Size 'A'	'B'		'C'	
B3170NF-1/2	1/2"	(15)	3/8"-16	27/16"	(61.9)	13/16"	(30.2)
B3170NF-3/4	3/4"	(20)	3/8"-16	2 1/2"	(63.5)	1 1/4"	(31.7)
B3170NF-1	1"	(25)	3/8"-16	2 5/8"	(66.7)	1 3/8"	(34.9)
B3170NF-1 1/4	1 1/4"	(32)	3/8"-16	2 7/8"	(73.0)	1 5/8"	(41.2)
B3170NF-1 1/2	1 1/2"	(40)	3/8"-16	3"	(76.2)	1 3/4"	(44.4)
B3170NF-2	2"	(50)	3/8"-16	3 7/16"	(87.2)	2 3/16"	(55.6)
B3170NF-2 1/2	2 1/2"	(55)	3/8"-16	3 7/8"	(98.4)	2 5/8"	(66.7)
B3170NF-3	3"	(80)	3/8"-16	4 1/4"	(107.9)	3"	(76.2)
B3170NF-3 1/2	3 1/2"	(90)	3/8"-16	4 5/8"	(117.5)	3 3/8"	(85.7)
B3170NF-4	4"	(100)	3/8"-16	5"	(127.0)	3 3/4"	(95.2)
B3170NF-5	5"	(125)	1/2"-13	5 9/16"	(141.3)	4 1/16"	(103.2)
B3170NF-6	6"	(150)	1/2"-13	6 7/16"	(163.5)	4 15/16"	(125.4)
B3170NF-8	8"	(200)	1/2"-13	7 11/16"	(195.3)	6 3/16"	(157.2)

Part No.	'D'	Design Load		Wt./C		
		Lbs.	kN	Lbs.	kg	
B3170NF-1/2	1 1/4"	(31.7)	180	(.80)	11	(5.0)
B3170NF-3/4	1 1/4"	(31.7)	180	(.80)	12	(5.4)
B3170NF-1	1 1/4"	(31.7)	180	(.80)	13	(5.9)
B3170NF-1 1/4	1 1/4"	(31.7)	180	(.80)	14	(6.3)
B3170NF-1 1/2	1 1/4"	(31.7)	180	(.80)	14	(6.3)
B3170NF-2	1 1/2"	(38.1)	180	(.80)	16	(7.2)
B3170NF-2 1/2	1 11/16"	(42.9)	200	(.89)	25	(11.3)
B3170NF-3	1 3/4"	(44.4)	250	(1.11)	29	(13.1)
B3170NF-3 1/2	1 7/8"	(47.6)	300	(1.33)	33	(14.9)
B3170NF-4	2"	(50.8)	360	(1.60)	40	(18.1)
B3170NF-5	1 3/4"	(44.4)	480	(2.13)	83	(37.6)
B3170NF-6	2 3/16"	(53.0)	630	(2.80)	91	(41.3)
B3170NF-8	2 7/16"	(61.9)	970	(4.31)	130	(58.9)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.