

caroma®

CI/SfB	(74.1)	g3
Date	October 2008	

Supersedes all previous issues

Bondi 270 Elongated

2.2.3

**1.6/0.8 gpf (6/3 l) Water Saving Dual Flush High Efficiency Toilet (HET)
Two Piece Ultra Low Flush (ULF) Vitreous China Washdown Toilet**



HIGH EFFICIENCY TOILET
HET

®
&

Bondi 270 Elongated 1.6/0.8 gpf (6/3 l) Dual Flush HET

Two Piece Ultra Low Flush (ULF) Vitreous China Washdown Toilet



A modern concept close coupled **1.6/0.8 gpf (6/3 l) Bondi 270 Elongated** dual flush toilet featuring unique two button activation providing substantial water saving compared to standard toilets. Adjustable rough-in and smooth rounded contours for easy cleaning. The closet bowl has been designed with rough-in of **10" (255mm) to 12" (305mm)** provided by plastic offset outlet connector option. The tank incorporates the high performance outlet valve which has been specially developed with the 270 elongated bowl to ensure optimum reliable flushing performance. Due to the substantial water saving benefits achieved by the 1.6/0.8 gpf (6/3 l) dual flush system, the toilet is suitable for multi-purpose applications where **water conservation** is important.

Closet Bowl: **270 Elongated** 1.6/0.8 gpf (6/3 l) full flush washdown closet bowl with open flushing rim.

Outlet: Floor mounted suitable for connection to waste outlet with offset plastic outlet connector for 10" (255mm) to 12" (305mm) rough-in.

Tank: **Bondi Tank** – has a free fitting lid and is suitable for domestic and light commercial applications. **Vandal Resistant Conversion Kit** – A simple to install conversion is available for the standard mechanism to lock lid onto the tank, recommended for use in heavy duty commercial areas. Code No. 413276.

Weight: 90 lbs (41 kg).


Water Control Valve: **Standard Bottom Entry Tank** – available as left hand inlet and incorporates a super quiet water control assembly. Internal overflow only.

Fixing: The tank is fixed directly to the closet bowl with a robust base fixing system without the need for wall fixing.

Seats: The following Caroma seats are recommended: **Elongated** Code No. 326307, **Elongated Soft Close** Code No.326221, and **Commercial** Code No. 326813.

Colors: White and biscuit.

Dimensions: All dimensions are in inches and millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

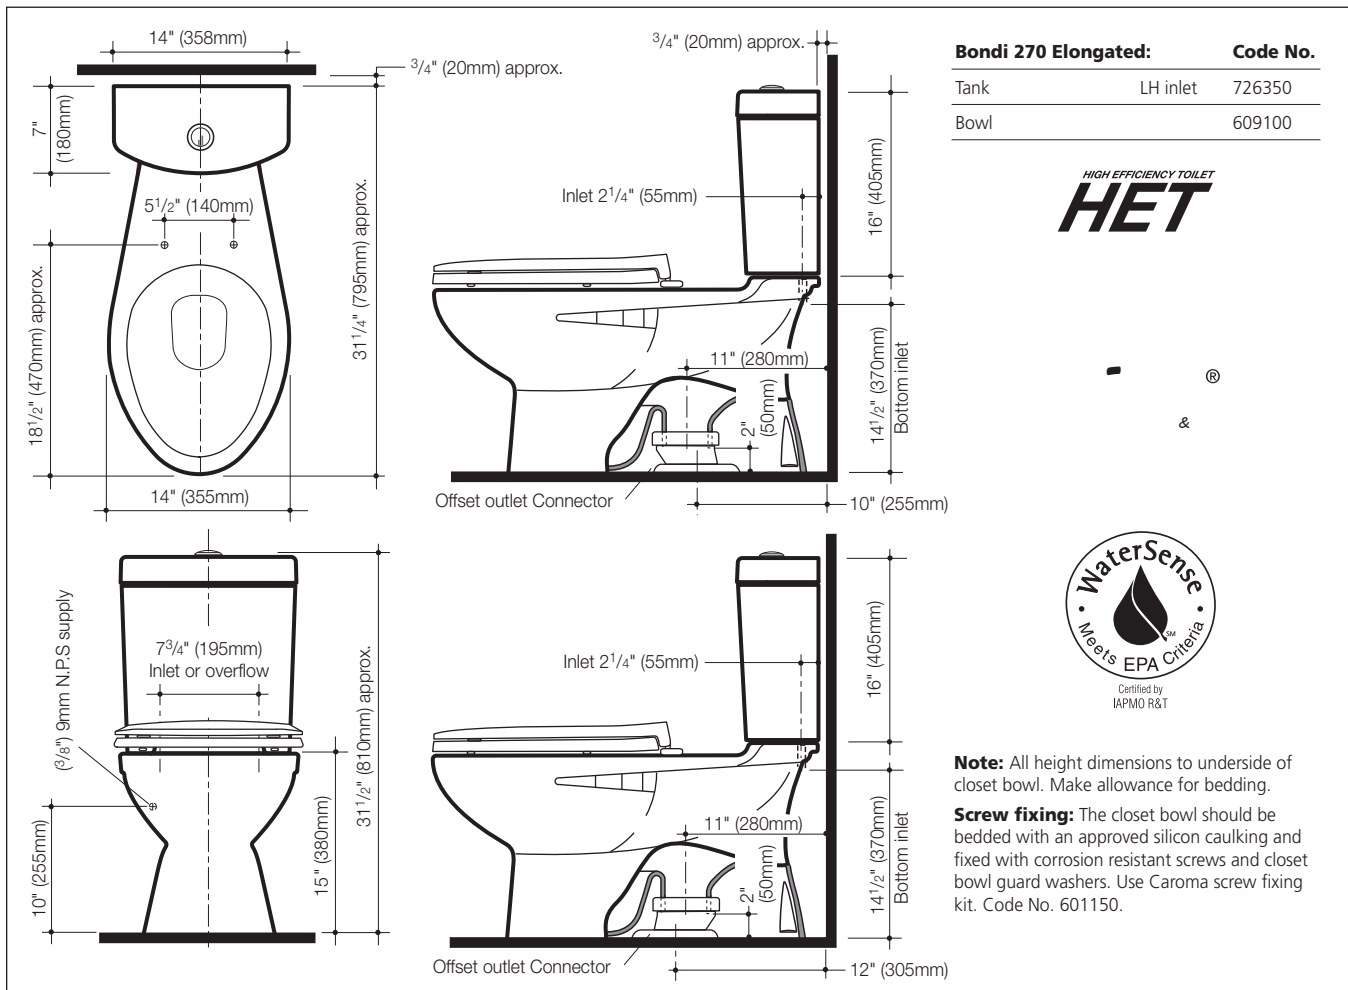

caroma®

CI/SfB	(74.1)	g3
Date	October 2008	

Supersedes all previous issues

Bondi 270 Easy Height Elongated

2.2.4

**1.6/0.8 gpf (6/3 l) Water Saving Dual Flush High Efficiency Toilet (HET)
Two Piece Ultra Low Flush (ULF) Vitreous China Washdown Toilet**



HIGH EFFICIENCY TOILET
HET



®
&

Bondi 270 Easy Height Elongated 1.6/0.8 gpf (6/3 l) Dual Flush HET

Two Piece Ultra Low Flush (ULF) Vitreous China Washdown Toilet



A modern concept close coupled **1.6/0.8 gpf (6/3 l) Bondi 270 Easy Height Elongated** dual flush wash-down toilet installation designed to provide a seat height of between 17" to 19" (430 to 485mm) measured to the top of the toilet seat. The closet bowl has been designed with rough-in of **10" (255mm)** to **12" (305mm)** provided by plastic offset outlet connector option. The tank incorporates the high performance outlet valve which has been specially developed with the 270 Easy Height elongated bowl to ensure optimum reliable flushing performance. Due to the substantial water saving benefits achieved by the 1.6/0.8 gpf (6/3 l) dual flush system, the toilet is suitable for multi-purpose applications where **water conservation** is important.

- Closet bowl:** **270 Easy Height Elongated** 1.6/0.8 gpf (6/3 l) full flush washdown closet bowl with open flushing rim.
- Outlet:** Floor mounted suitable for connection to waste outlet with offset plastic outlet connector for 10" (255mm) to 12" (305mm) rough-in.
- Tank:** **Bondi Tank** – has a free fitting lid and is suitable for domestic and light commercial applications. **Vandal Resistant Conversion Kit** – A simple to install conversion is available for the standard mechanism to lock lid onto the tank, recommended for use in heavy duty commercial areas. Code No. 413276.
- Weight:** 96 lbs (44 kg).
- Water Control Valve:** **Standard Bottom Entry Tank** – available as left hand inlet and incorporates a super quiet water control assembly. Internal overflow only.
- Fixing:** The tank is fixed directly to the closet bowl with a robust base fixing system without the need for wall fixing.
- Seats:** The following Caroma seats are recommended: **Elongated** Code No. 326307, **Elongated Soft Close** Code No. 326221, and **Commercial** Code No. 326813.
- Colors:** White and biscuit.
- Dimensions:** All dimensions are in inches and millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

