DELTA

TECK® COMMERCIAL

HydroPower™

HYDROPOWER™
FOR USE ON 590T1, 591T1, 601T, 611T, 1501T & 3001TA

HydroPower™ is only available as follows:

(A) With SELECT Factory supplied 590T1, 591T1, 1501T and 3001TA models that have
– Control Box #0 selected and a selected spout with a minimum 1.5 USGPM (5.7 L/min) outlet flow rate (add **"-HP"** suffix to battery base model)

(B) With SELECT Factory supplied 601T and 611T models that have
– A selected spout outlet with a minimum 1.5 USGPM (5.7 L/min) outlet flow rate (add **"-HP"** suffix to battery base model)

(C) If any of the above products were NOT factory supplied as HydroPower, they can be converted to HydroPower in the field by ordering the **062015A Conversion Kit**. This kit includes a generator assembly, a power module, hose and a 1.5 USGPM (5.7 L/min) outlet.

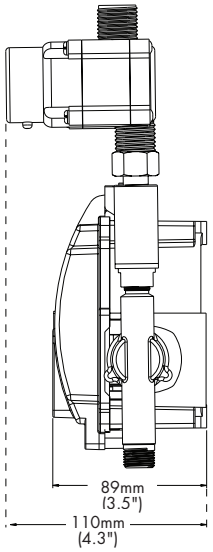

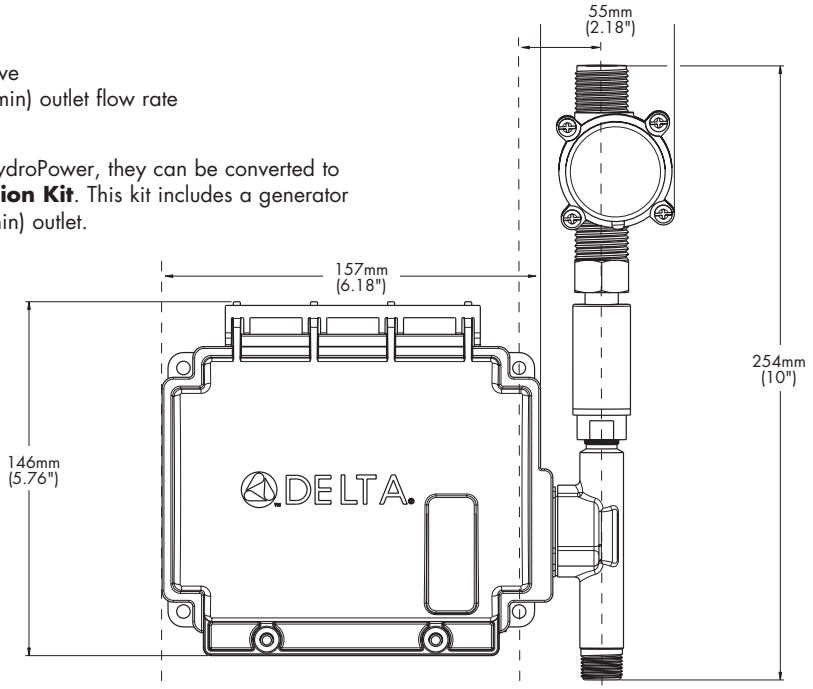

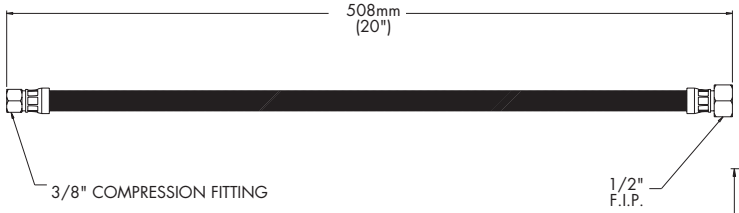

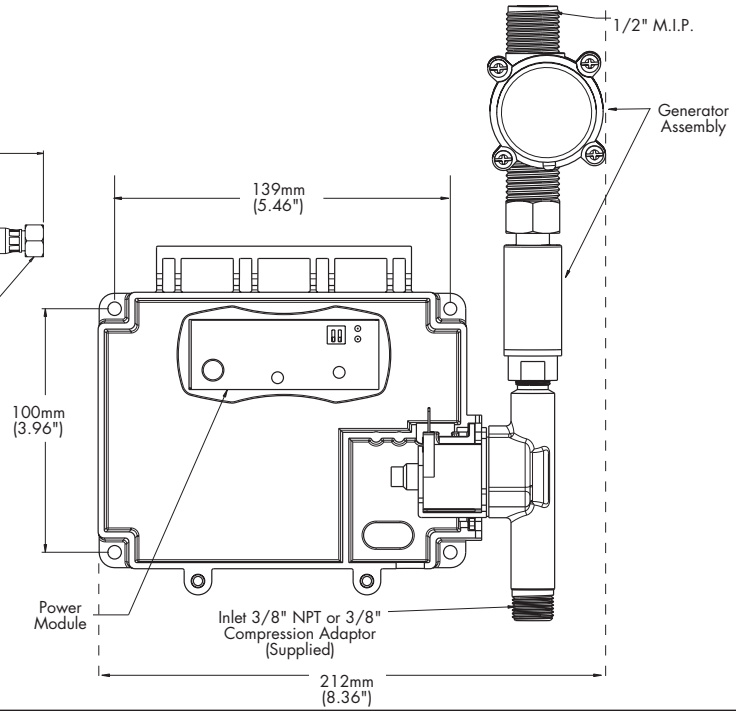



061062A

- HydroPower™ Recharger Kit (optional – order separately).
- Available to recharge battery packs if not used frequently enough to keep charge.

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.