




# WATER EFFICIENT LAVATORY AERATORS

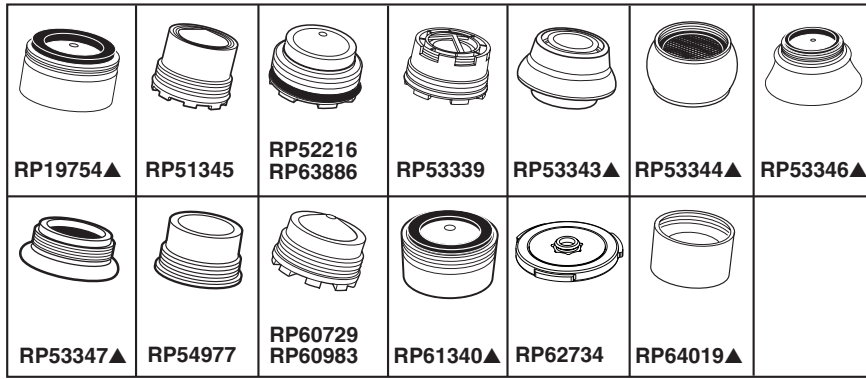

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Part #	Description	Models	Finishes
RP19754	1.5 gpm aerator assy 15/16"-27 male	585, 3585, 586, 3586, 2530, 3530, 4530, (500, 501, 502, 505, 520, 522, 523, 524, 525, 540, 541, 542, 544, non-DST), 3544, 3543, 2522, 2521, 2520, 2502, 2500, 583, 2583, 3483, 3582, 582	Chrome, PB, NN, BB, SS, SN, RB
RP51345	1.5 gpm aerator assy M16.5x1 male	(538 non-DST), 2538, 3538, 4538, 2592, 3592, 4592 Wrench Included	N/A
RP52216	1.5 gpm aerator assy M21.5x1 male	2551, 3551, 4551 (500, 501, 502, 511, 515, 516, 520, 522, 523, 540, 541, 542, 544 DST) Wrench RP52217	N/A
RP53339	1.5 gpm aerator assy M21.5x1 male	578, 579 non-DST Wrench RP52217	N/A
RP53343	1.5 gpm aerator assy 3/4"-27 female	555, 755, 2555, 3555, 4555, 2155	Chrome, NN, PB, RB, SS, PT
RP53344	1.5 gpm aerator assy 15/16"-27 male	2540, 3540, 4540	Chrome, SS, PT
RP53346	1.5 gpm aerator assy 55/64"-27 female	2569, 3569, 4569	Chrome, SS, RB, PT
RP53347	1.5 gpm aerator assy 13/16"-27 male	2578, 3578, 4578, 2575, 3575, 4575	Chrome, RB, BRC, SS
RP54977	1.5 gpm aerator assy 13/16"-27 male	(538, 578, 579, 551, 592, 751, 792, 2578, 3578, 15938T DST) Wrench RP52217	N/A
RP60729	0.5 gpm M21.5x1 male	(500, 501, 502, 520, 522, 523, 524, 525 DST) Wrench RP52217	N/A
RP60983	1.5 gpm aerator assy M21.5x1 male	(500, 501, 502, 520, 522, 523, 524, 525 DST) Wrench RP52217	N/A
RP61340	1.5 gpm aerator 15/16"-27 male	B501LF, B510LF, B512LF, (B2510LF, B2512LF - Male), B2596LF, B3596LF	Chrome, SS, OB
RP62734	1.5 gpm insert	All handshowers	N/A
RP63886	1.0 gpm aerator M21.5x1 male	2551, 3551, 4551 (500, 501, 502, 511, 515, 516, 520, 522, 523, 540, 541, 542, 544 DST) Wrench RP52217	N/A
RP64019	1.5 gpm aerator 15/16"-27 female	B2510LF, B2512LF - Female	Chrome, SS

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

DSP-L-AERATORS Rev. A

## STANDARD SPECIFICATIONS:

- Maximum 0.5 gpm flowrate @ 60 PSI.
- Maximum 1.0 gpm flowrate @ 60 PSI.
- Maximum 1.5 gpm flowrate @ 60 PSI.
- Water efficient uses 30% less than industry standard of 2.2 gpm @ 60 PSI per ASME.


## WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



## COMPLIES WITH:

- ASME A112.18.1 / CSA B1 25.1

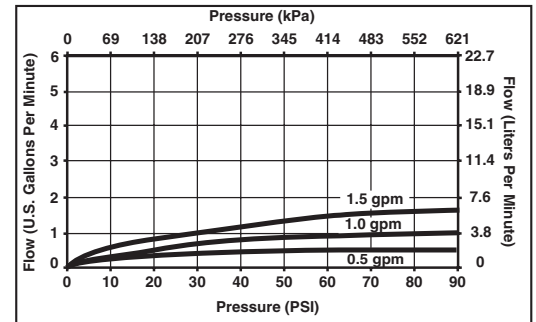

55 E. 111th Street, Indianapolis, Indiana 46280  
395 Matheson Blvd. E., Mississauga, ON L4Z 2H2  
© 2010 Masco Corporation of Indiana