

26F and 26W UTILATWIN® Laundry/Utility Tub Premier



26F and 26W UTILATWIN® Laundry/Utility tubs — Premier

- Sturdy, 1-Piece, Extra Deep Molded Tubs
- Made with DURASTONE® — combination of fiberglass and crushed stone blended with special resins for extra strength and durability, marbled white
- Include Twin Drain Waste connector — joins drain assemblies assures rapid and uniform discharge of waste water, washers slip nuts and stoppers provided
- 19 Gallon Capacity Per Tub, 13" Deep
- Hooks Up to Standard 1-1/2" P or S Trap
- Accommodate Single or Dual-handle Faucet with 4" or 8" Centers
- Floor Model Includes Adjustable Leg Levelers for Uneven Floor
- Wall Model Includes Wall Mounting Bracket, Side Supports and Hardware for Securing Tub to Concrete or Stud Wall
- Smooth Surface, Rust Resistant
- Easy to Assemble and Install
- Preferred by the "Pros"

Code Accepted


utility sinks meet or exceed performance requirements:

- International association of plumbing and mechanical officials (iapmo®)— listed file #0820
- Warnock hersey® (canada) — csa #b45.0 and #b45.5 — #B125
- American national standards institute (ansi)— specification z 124.6



SPECIFICATIONS

Model No.	Mounting	UPC
26F	Floor	6 71031 00054 5
26W	Wall	6 71031 00055 2

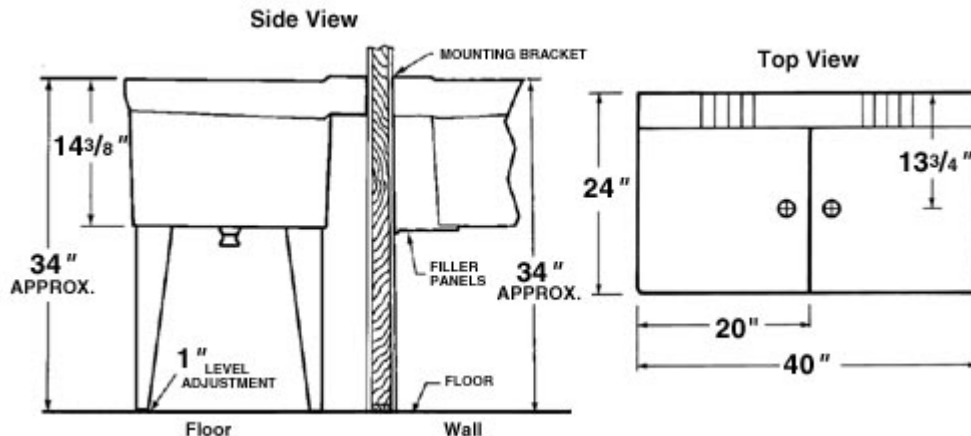

General: Furnish and install as shown on plans, UTILATWIN® Laundry/Utility Tubs model ____ (26F, 26W), as manufactured by E.L. Mustee & Sons, Inc. Unit shall be one-piece molded construction using DURASTONE®, a blend of natural crushed stone and polyester resins molded with matched metal molds under extreme heat and pressure. Complete drain assembly, twin drain waste coupling, recessed divider wall between tubs and floor or wall mounting hardware. Shall meet ANSI Specification Z 124.6.